



**ADVANTAGES OF THE ACOUSTIC TARPAULIN BSBA17+**


- Suitable for all types of supports: scaffolding, construction site fencing (Heras type), other.....
- Light
- Easy to install and remove
- Weather and UV resistant
- Good fire resistance (M2)
- Ideal for short job sites
- Customizable
- Easy cleaning
- Transport flat or rolled

Also available in version 10, 12, 14 et 15 dB

**ACOUSTIC PERFORMANCE**

Frequency (in Hz)	125	250	500	1K	2K	4K
Acoustic Impairment Tarpaulin BSBA17+ (in dB)	8,3	12,9	13,5	15,7	19,3	22,3


Rw (C ; Ctr) = 17 dB (0 ; -2)

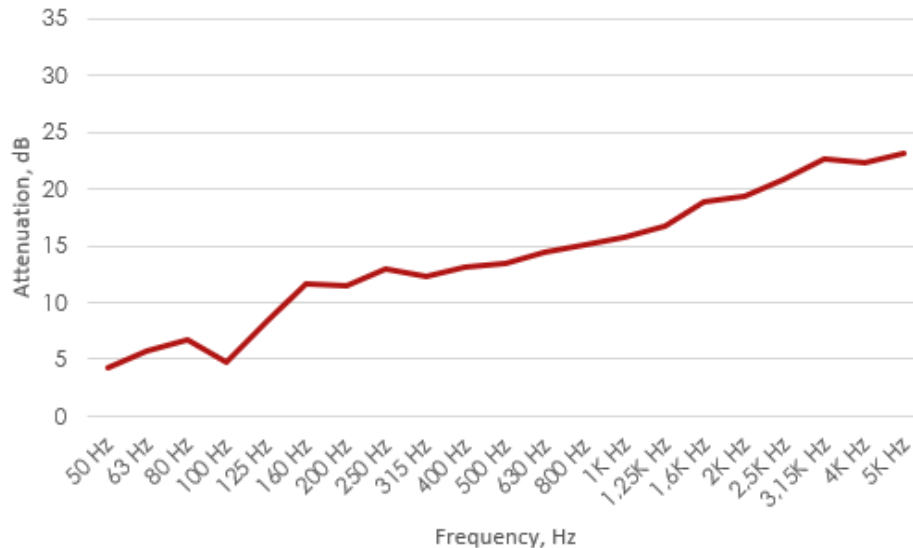

Test performed according to the standard ISO




Rw 17 dB



Ajustable




Quickfix®



Fabriqué en France

## TECHNICAL CHARACTERISTICS OF THE ACOUSTIC TARPAULIN BSBA17+

- Dimensions : Standard (3,5 x 2 metres of height) or customised
- Composition : Foam PVC thickness 5mm
- Weight : 1920 g/m<sup>2</sup>
- Reaction to fire: M2 Norme NFP 92507
- Manufacture : Sewing connection and eyelets 16 in nickel plated brass every 500 mm on the circumference
- Treatments : Anti UV, fungicide and anti-mould
- Temperature resistance: - 30°C to + 70°C
- Absorption Coefficient :  $\alpha_W = 0,6$  Test performed according to standard EN ISO 11654
- Mechanical characteristics:  
Tensile strength (warp/weft) : 2600N /2500N / 5 cm  
Tear resistance (warp/weft) : 3200N / 28000N / 5 cm
- Standard color : light grey




## OPTIONS AVAILABLE

- Custom digital printing



- Fixing accessories

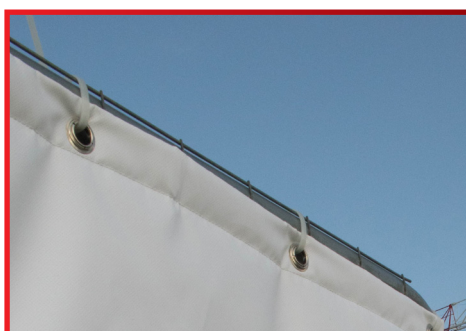

- Special fixings: on request for specific environment and for custom tarpaulins (cables, slides, specific anchors, etc.....)



**BOËTSTOPSON**  
The Sound of Silence